

# WELLAND

## USB over IP ShareServer 4 Ports USB2.0, Ethernet 10/100Mbps




**NetBo  
NH-204**

Sharing USB peripherals on a network now can be convenient by using the pocket-size NetBo USB Server.

The NetBo USB ShareServer allows multiple users to share a Multi-Function Printer over a network and also supports USB storage, like external hard drive, flash drive, USB card reader, USB camera, USB speaker and USB printer, all extensible over the 10/100Mbps port to your network. There is a built-in USB2.0 hub extension, so you can shove in up to 4 USB devices to use.

The NH204 is also a nice halfway station on the way to wireless application. It is essentially an USB hub that allows device sharing over the WIFI network when it connects to a wireless router. Definitely useful for small house or office network application.

### Application:

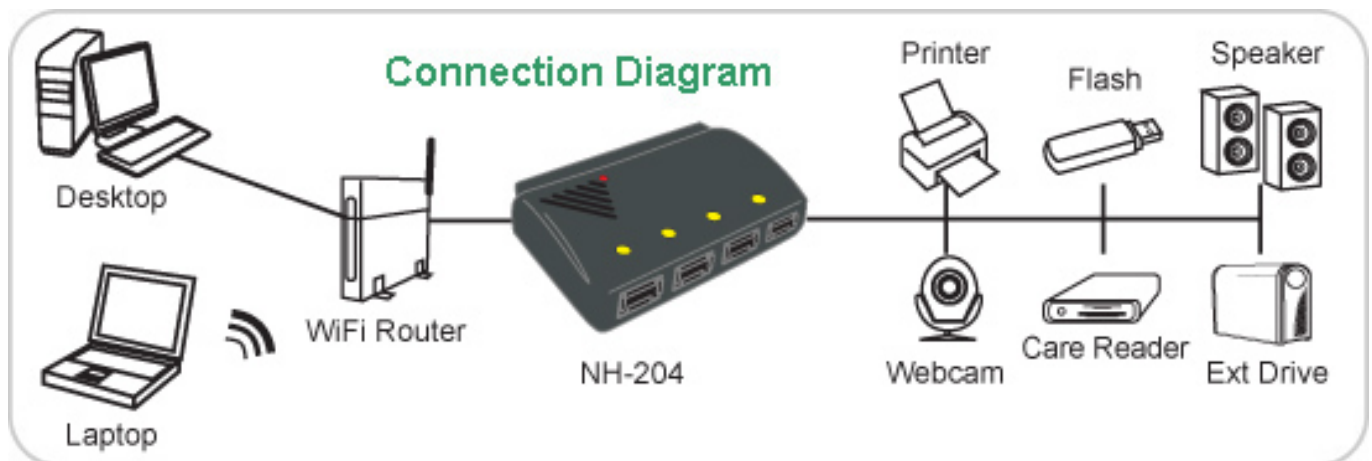

# WELLAND

## Feature :

- Share USB 2.0 devices through your existing office or home IP network
- Share up to 4 USB 2.0 devices with the support of USB 2.0 Hub extension
- Allows multiple users to share a Multi-Function Printer (MFP) over the network to print, scan, and fax from any networked computer
- Allows multiple users to share an external hard drive, flash drive or memory card reader over the network.
- Share a USB1.1 webcam over a network. (Only 1 unit of USB1.1 webcam simultaneously)
- Enjoy music stored on any networked PC with an USB speaker.
- Simple GUI for easy configuration, monitoring, and firmware upgrade.
- Supported protocols : LPR/LPD, DHCP.
- Support USB2.0 and backward compatible USB 1.1 devices.

*Note : Some USB devices require a direct connection to PC for optimum performance.*

## Specification :

<b>Model Name</b>	NetBo
<b>Model Number</b>	NH204
<b>Color</b>	Black
<b>Material</b>	Plastic
<b>Network Protocol</b>	TCP/IP
<b>Interface</b>	<ul style="list-style-type: none"><li>● 10/100Mbps RJ45 x 1</li><li>● USB2.0 x 4 (backward compatible with USB1.1)</li></ul>
<b>OS Supported</b>	<ul style="list-style-type: none"><li>● CPU of 1.7GHz and above</li><li>● Minimum 512MB RAM</li><li>● Windows 2000/XP/Vista</li><li>● Available Ethernet port in home/office network</li></ul>
<b>Application</b>	<ul style="list-style-type: none"><li>● Printer or Multi-function printer with USB connection</li><li>● External USB hard drive</li><li>● USB speaker</li><li>● USB webcam (USB1.1 only)</li><li>● USB flash drive</li><li>● USB memory card reader</li><li>● USB printer</li><li>● USB scanner</li></ul>
<b>Network Printer Wizard</b>	Driver to support auto connect/disconnect printer <b>Note: Supported Windows XP/Vista only</b>
<b>Power Supply</b>	AC Input : 100~240V , DC Output : 5V / 2A
<b>Accessories</b>	<ul style="list-style-type: none"><li>● External Power Adapter</li><li>● CD (contents User Utility Software &amp; Manual)</li><li>● LAN Cable</li><li>● QIG</li></ul>
<b>Packing</b>	20 sets/Carton
<b>Hub Dimension</b>	90 x 60 x 25 mm (L x W x H)